
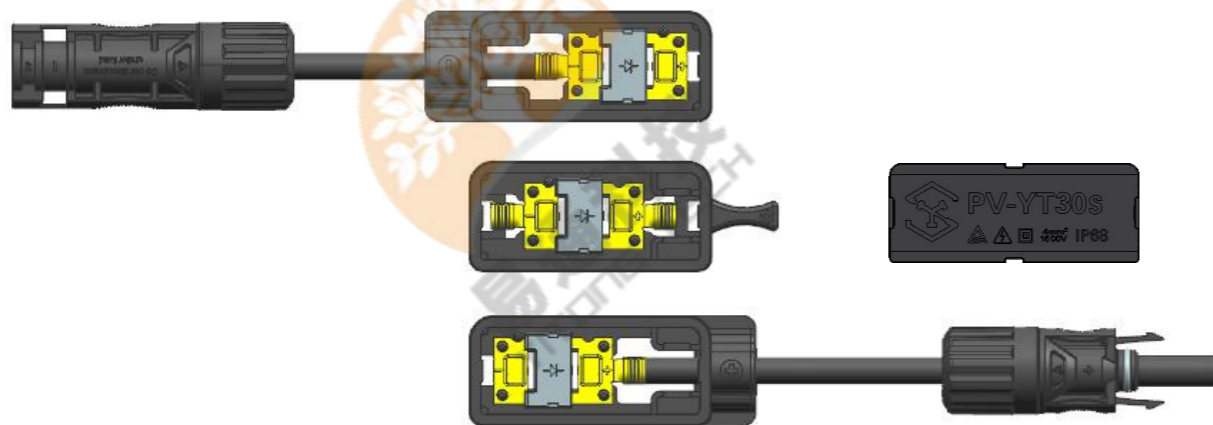


ulti/monocrystalline Module Jnction Box/单多晶硅接线盒 PV-YT30S

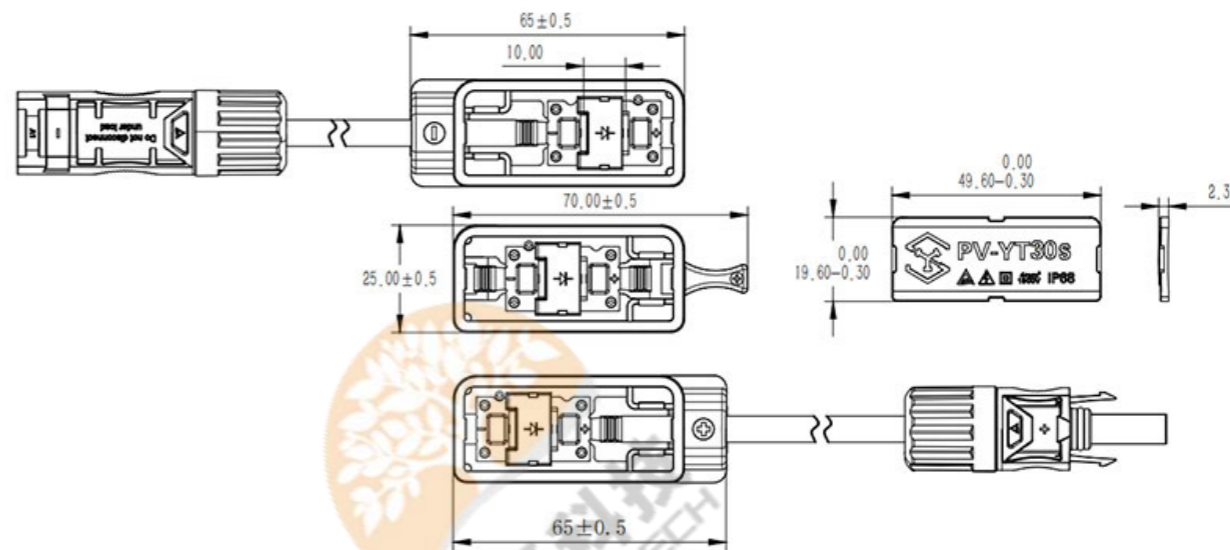

Basic Technical Data/基本技术参数

Certifications/认证	TUV
RATED Voltage/额定电压	1500V DC
Temperature Range/温度范围	-40℃~+85℃
Safety Class/安全等级	Class II
Protection Degree/保护等级	IP68
Wire Size Range/线缆尺寸范围	4mm ²
Flame Resistance/阻燃等级	5VB
Waterproofing Structure/防水结构	Potting sealant/灌封胶
Volume of silicon gel/灌胶量	APPr. 20.5ml/约 20.5ml
Width of copper Ribbons/焊带宽度	Up to 8mm/最大 8mm
Connection Method/连接方式	Soldering/焊接
Insulation Material/绝缘材料	PPO
Overall Dimension/外形尺寸	65*25*14.5 70*25*14.5
Optional Connector/可选连接器	18-01

Product number 产品型号	Rated current 额定电流	Circuit 电路	Distance between the terminals 端子间距 (mm)	No. of diode 二极管数量	Diode type 二极管型号
PV-YT30s	20A/25A/30A		10	3	GFMK3045 GFMK6045C GF3045 GF6045 GF6045T